
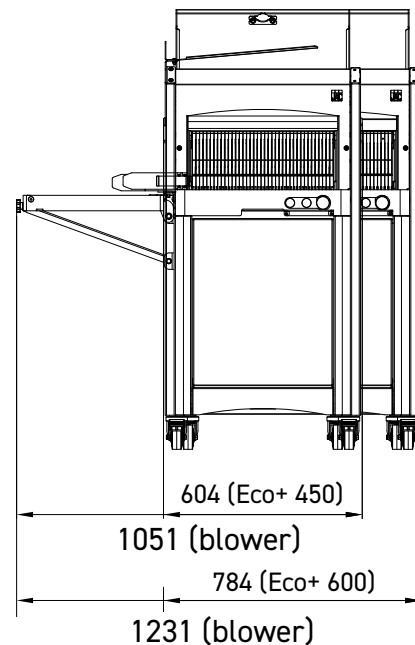


ECO+

- ✓ Automatic control system of pressure and slicing speed thru ISC[®] system : no manual setting needed
- ✓ Automatic control system of the cutting action AutoMode (start and finish) : no buttons or cover (optional)
- ✓ Easy to use for all
- ✓ Removable, ergonomic crumb collector
- ✓ Silent

ECO+ 450: Up to 250 loaves an hour

ECO+ 600: Up to 500 loaves an hour

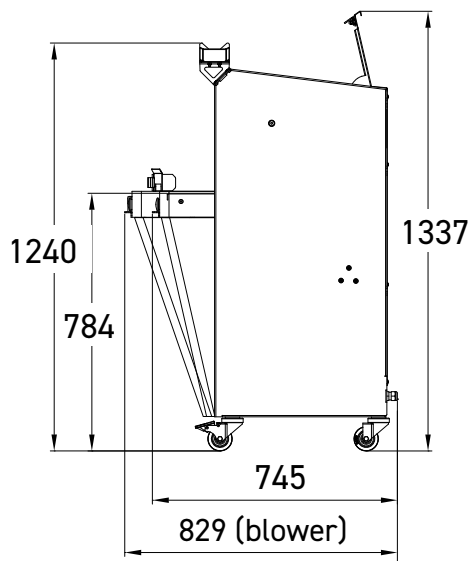



ISC® (Intelligent Slicing Control) (patent JAC)
Automatic control system of pressure and slicing speed . It adapts the cutting action according to the consistency of the bread. no manual setting needed.




Type available "M" system

Micronised knife lubrication system for cutting bread with a high rye content or sticky crumb. Developed by JAC, it consumes the least possible amount of oil (120 ml per 1000 loaves) and delivers consistent cutting quality.

ISC extended mode selector

Two automatic extra modes, in order to adapt to extreme cutting conditions of very fresh breads or high cutting rates.



Option

Double slice thickness

Allows two different slicing widths on the same machine



Removable crumb collector


Accessible by tilting the front, cylinder-assisted door. 18 litre capacity.



Option

Foldable bag blower

Saves packaging time.

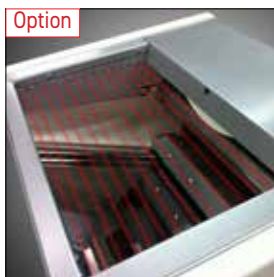

Option

AutoMode


Automatic cutting cycle for optimum time management. Increased accessibility while maintaining an optimum safety level.

Achieves maximum output combined with fewer operations.

Option Black Edition



FEATURES

	ECO+ 450	ECO+ 450M 	ECO+ 600
Max. loaf dimensions in cm (L x W x H)	44 x 31 x 16	44 x 30 x 16	60 x 31 x 16
Motor power in kW	0.49	1.1	0.49
Net weight (in kg)	165	175	180
Blade type and dimensions in mm	13 x 0.5 steel	13 x 0.5 Teflon coated	13 x 0.7 steel
ISC extended mode selector	•	•	•
Daily adding counter		•	

CHOICES

	9 - 18	9 - 12	11 - 18
Slice thickness in mm			
Loaf pusher height	Extra low (50mm) Low (80mm) High (100m)	Misch (80mm)	Extra low (50mm) Low (80mm) High (100m)
Power supply	230V single phase 230V three-phase 400V three-phase	400V three-phase	230V single phase 230V three-phase 400V three-phase
Standard colour*	•	•	•

OPTIONS

Heavy duty motor	•	Standard	•
Foldable bag blower	•	•	•
AutoMode	•	•	•
Black Edition Finish**	•	•	•
4 cm height adjustment	•	•	•
Double slice thickness	•	n/a	•
Daily adding counter	•	Standard	•
Special colour	•	•	•
Special blades	•	Standard teflon	n/a

**Only available on machines equipped with Automode

*STANDAARDKLEUREN

RAL 1015

RAL 3013

RAL 9005

RAL 9006

RAL 9010